



Stadium LED Screen

ES Series

激情世界杯，邀您一起
世界杯，邀您一起共享精彩赛事

世界杯，邀您一起共
世界杯，邀您一起共享精彩赛事

激情世界杯，邀您一起共享精彩赛事


激情世界杯，邀您



HD resolution



High brightness



High refresh rate



Remote control



Large viewing angle



Front/rear
maintenance




Seamless splicing



High protection

Cabinet dimension

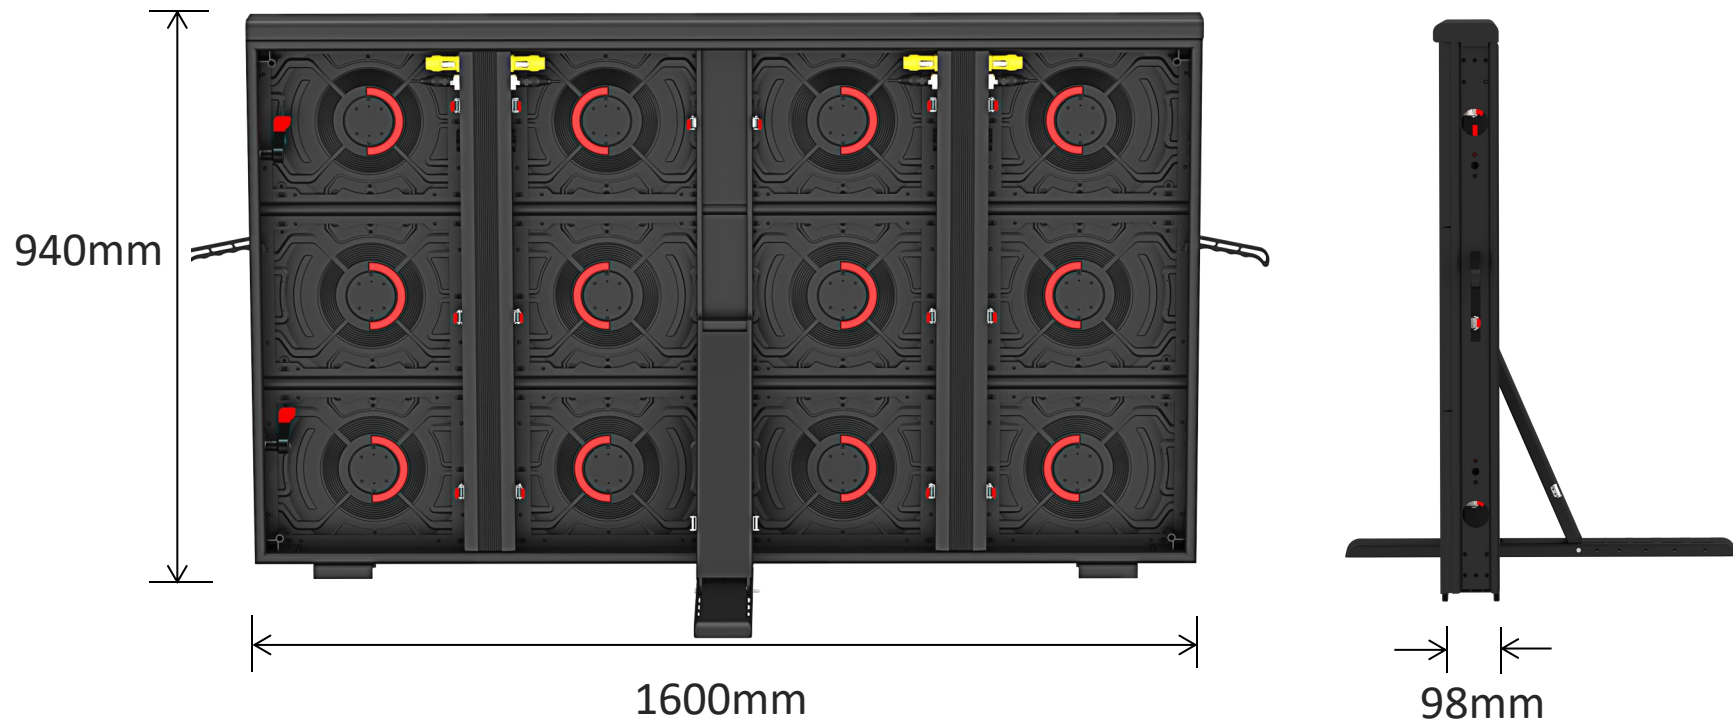


Cabinet weight



1600X940(mm)

35kg

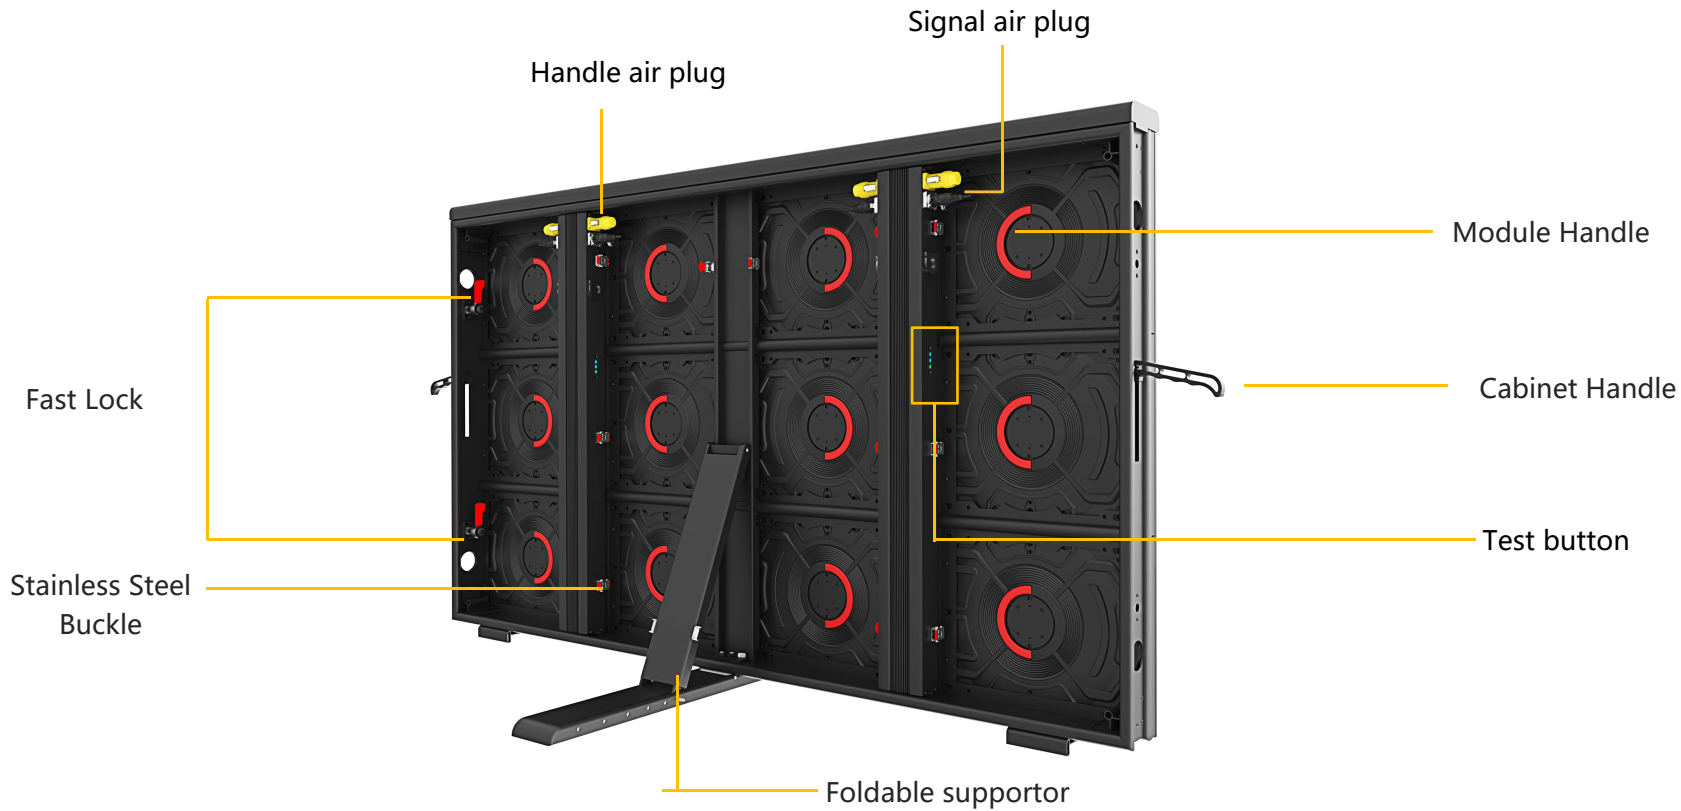

Signal air plug

Handle air plug

Module Handle

Cabinet Handle

Test button

Fast Lock

Stainless Steel Buckle

Foldable supportor

Front&rear maintenance

Both front and back maintenance meets different site application .



High image quality

Boasting a high brightness of 6000-6500 cd/m² and a high refresh rate, it delivers stable dynamic display effects and a more comfortable visual experience.



High Protection


With an IP65 high protection rating, it's waterproof, dustproof, UV-resistant, and anti-interference, ensuring uninterrupted use in any harsh outdoor environment.



Adjustable angle wide viewing angle




Screen angle can be adjusted in 90°、95°、100°、
105°、110°、115°

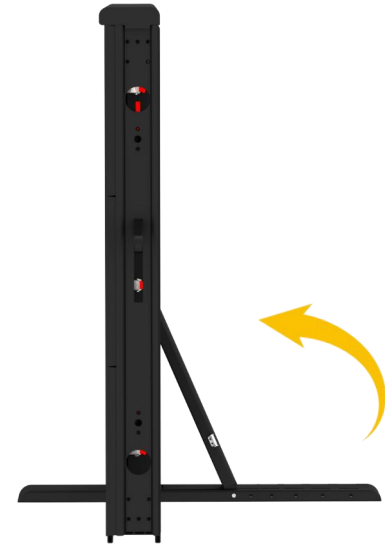

The stand can be folded
and hidden

160° Super wide viewing angle

With a super-wide viewing angle of 160 degrees, the images are lively and vivid, with no dead corners, right before your eyes.

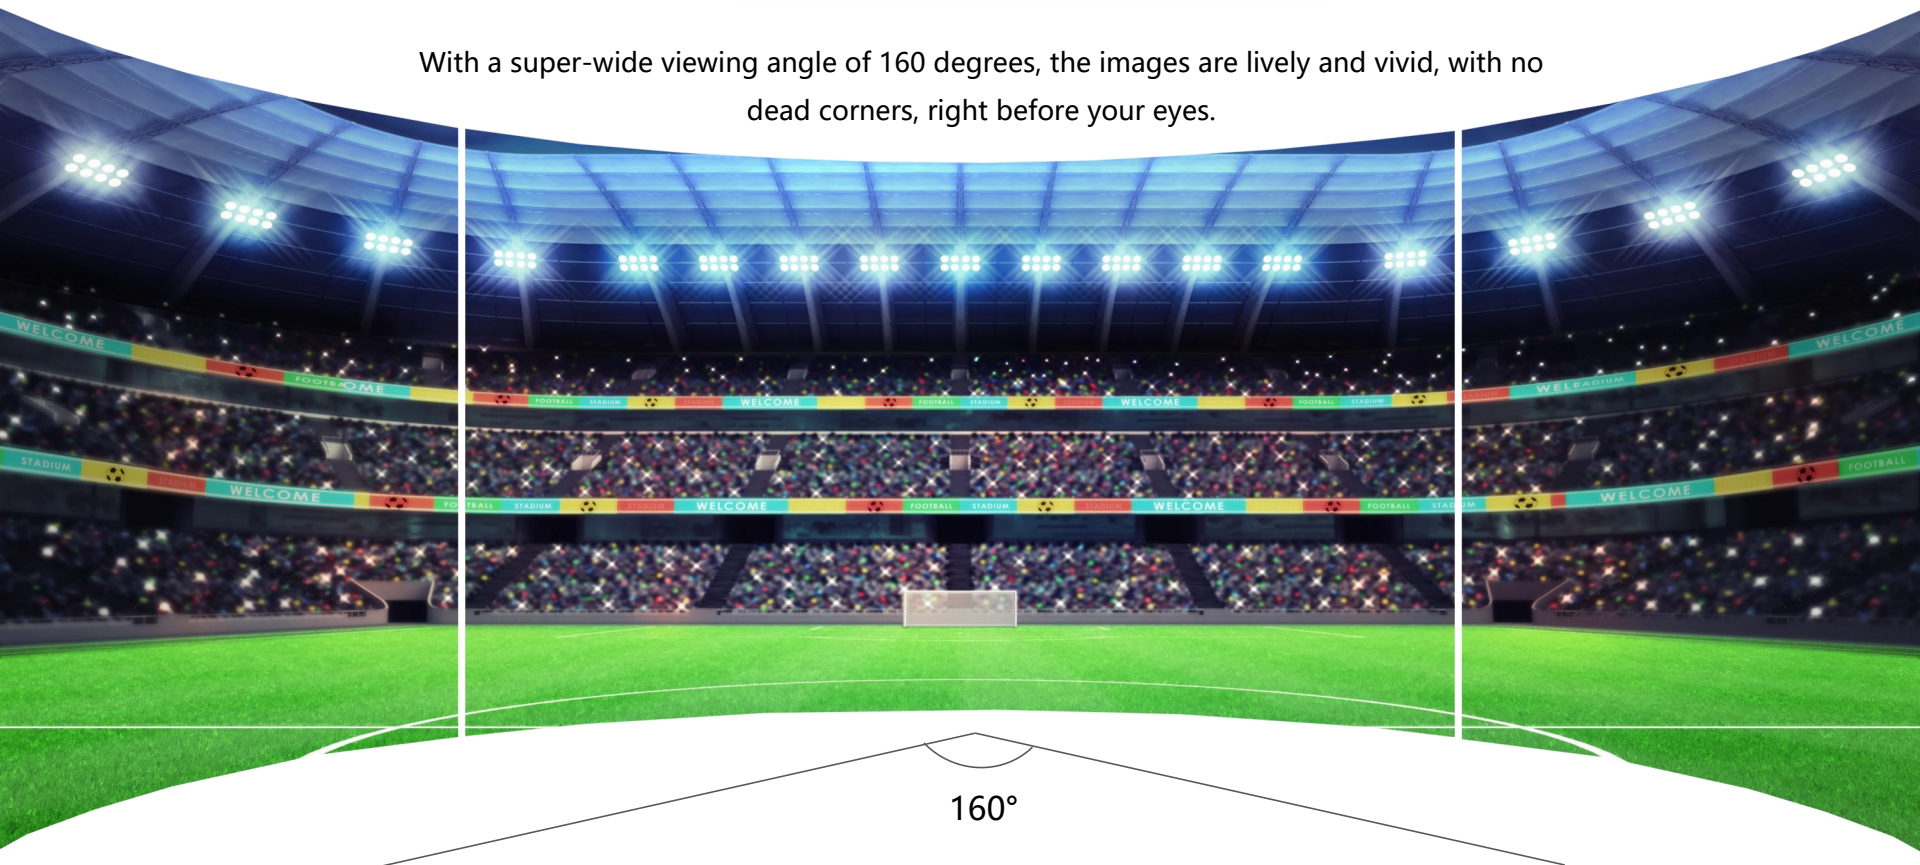

160°



SMT machine



Workshop



Aging test



Process packing



Package



Packed

Applications



Pixel Pitch	P6.25	P8.33	P10
LED Type	SMD2727	SMD2727	SMD2727
Physical Density(dots/m ²)	25600	14400	10000
Module resoluiton	64X48	48X36	40X30
Module size(WXH)	400X300	400X300	400X300
Cabinet size(mm)	1600X940X98	1600X940X98	1600X940X98
Cabinet resoluiton	256X144	192X108	160X90
Module quantity	4X3	4X3	4X3
Panel weight(kg)	35	35	35
Maintenance	Front/reart maintenance	Front/reart maintenance	Front/reart maintenance
Cabinet material	Aluminum	Aluminum	Aluminum
Brightness(Nits)	6500	6500	6500
Color temperature(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle(H/V)	140°/160°	140°/160°	140°/160°
Viewing distance	6-200m	8-200m	10-200m
Contrast ratio	10000 : 1	10000 : 1	10000 : 1
Frame rate	50/60	50/60	50/60
Drive mode	1/6 scan	1/3 scan	1/2 scan
Grey scale	16bit	16bit	16bit
Refresh reate(Hz)	3840	3840	3840
Max Power consumption(W/m ²)	680	680	680
Avg. power consumption(W/m ²)	120-200	120-200	120-200
Protection level	IP65	IP65	IP65
Power input	AC90-264V,47-63Hz		
Working temp./Humidity(°C/RH)	-20~60°C/10%~85%		
storage temp./Humidity(°C/RH)	-20~60°C/10%~85%		
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC		

THANKS